



QCOAT

OUTDOOR TIMBER OIL

PENETRATES | PROTECTS | STABILISES



- ✓ ENHANCES NATURAL TIMBER COLOUR
- ✓ COATING DOESN'T CRACK OR PEEL
- ✓ EASY TO MAINTAIN – NO SANDING!

- ✓ FAST AND EASY TO APPLY
- ✓ NO WEATHERING REQUIRED
- ✓ AUSTRALIAN MADE

1800 268 286 www.baywood.com.au/qcoat

PREPARATION

FRESH UNCOATED TIMBER

- ✓ Ensure timber is clean & dry – use a broom or bristle brush to sweep off dirt and debris.

PREVIOUSLY COATED TIMBER

- ✓ If Qcoat was used previously, simply ensure timber is clean & dry. Otherwise previous coating must be sanded off to allow Qcoat to penetrate.
- ✓ Remove mould or algae using timber cleaning product – allow to dry.

AGED (GREY) TIMBER

- ✓ To retain the 'grey look', simply ensure the timber is clean & dry. If not, lightly sand timber to bring back original colour.
- ✓ Remove mould or algae using timber cleaning product – allow to dry.

APPLICATION

NOTE: *New timber should be coated on BOTH SIDES before installation*

1. Calculate quantity of oil required as follows (per side):
 - i. For pine allow 6-8m² per litre
 - ii. For hardwood allow 10-12m² per litre
 - iii. 2nd coat will require less oil
2. Stir the oil thoroughly before use – don't use thinners
3. Use a brush or wool applicator to evenly spread the coating onto timber
4. Take time to ensure cut and exposed ends are thoroughly soaked
5. Allow to dry (6-8 hours) before applying 2nd coat
6. After 2nd coat allow a further 12 hours before walking on

MAINTENANCE

NOTE: *Each coat is cumulative and builds up additional stability & protection*


1. Re-coating time depends on usage and weather exposure
2. If water stops beading on the surface it's time to re-coat
3. For best protection on fully exposed timber such as jetties, re-coat every 12 months. Spend a little to save a lot!

CLEAN-UP & DISPOSAL

1. Clean all coating equipment with mineral turpentine
2. Keep unwanted product in sealed container for disposal via collection facility
3. Where possible, recycle empty containers – check with local council first

SAFETY

1. Keep out of reach of children
2. Avoid contact with skin and eyes
3. Ensure coating area is well ventilated
4. Wear appropriate personal protection equipment
5. Keep away from potential sources of ignition

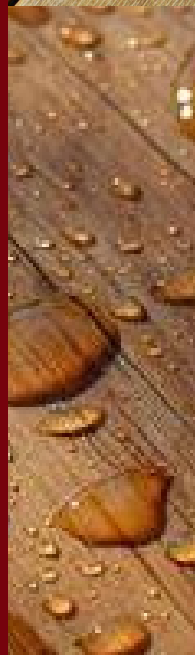

Qcoat is a penetrating timber oil formulated to protect outdoor timber from the effects of weathering by repelling moisture and improving dimensional stability. Qcoat is specially designed for use with outdoor timber projects such as decks, boardwalks, jetties, bollards, fences and park furniture. Suitable for use with all timber species, Qcoat brings out the warmth and beauty of real natural timber.